


Trending Accessibility

SUBMITTAL DATA

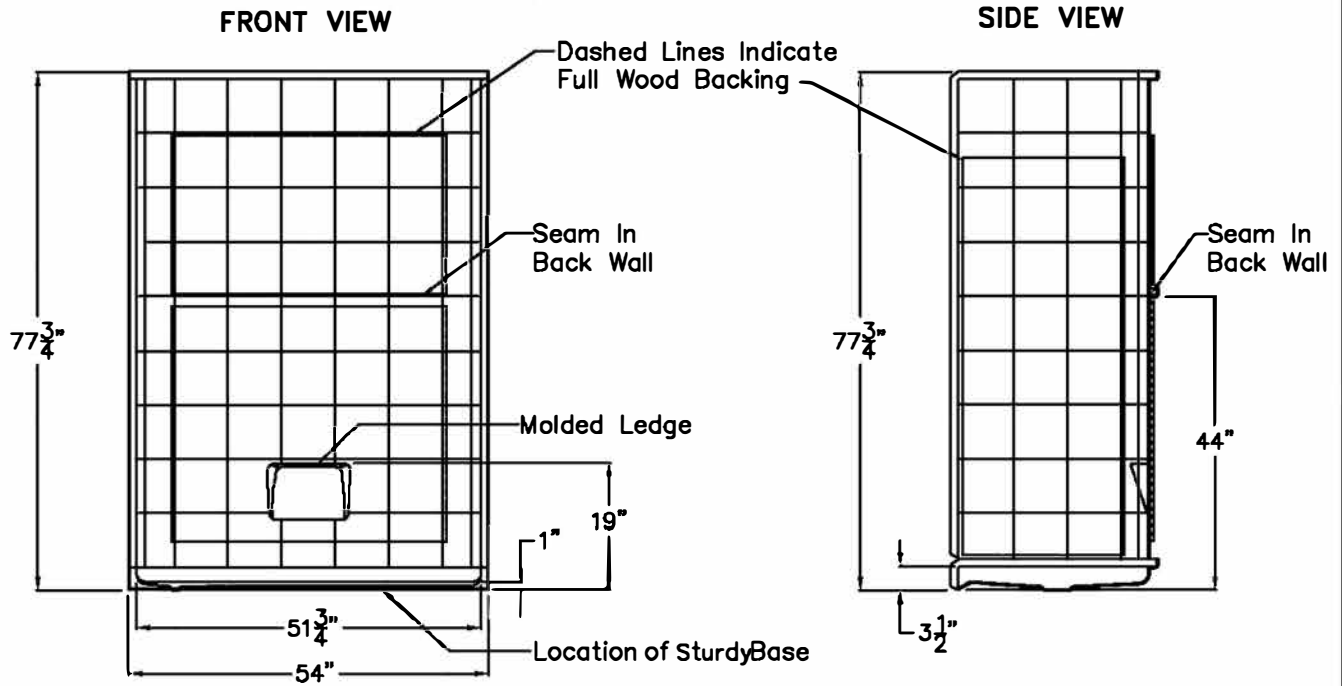


Barrier Free Sectional Shower Stall

The shower enclosure shall be TAP 5430 BF 1.0 Five Piece, Right, Left Drain. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mils, and a finished cured Borcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a 15% minimum fiberglass content. The unit shall have outside dimensions of 54" x 31" x 77 3/4". The five piece unit shall meet ANSI 2124.2, NAHB, UPC, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following Installed accessories:
 1) 1" Theshold, 2) Tile Finish, 3) Two Piece Back Wall, 4) Full wood backing on walls, 5) Left or right drain location, 6) SturdyBase self-sustaining bottom, 7) lower molded ledge on back wall.

Detail of 1.0" Threshold

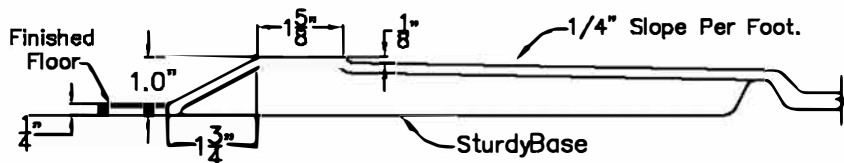

DUE TO THE NATURE OF THE MATERIALS INVOLVED
 UNIT DIMENSIONS MAY VARY $\pm 1/2$ INCH

Trending Accessibility

Drawing #: TAP 5430 BF 5P 1.0
 Left or Right Drain

Model No.:

Approved by:

Date Approved:

Date: 3-31-09

Revised: 8-9-13


Rep.:

Wholesaler:

Quote No.

Board Placement Drawing

SUBMITTAL DATA © 2004

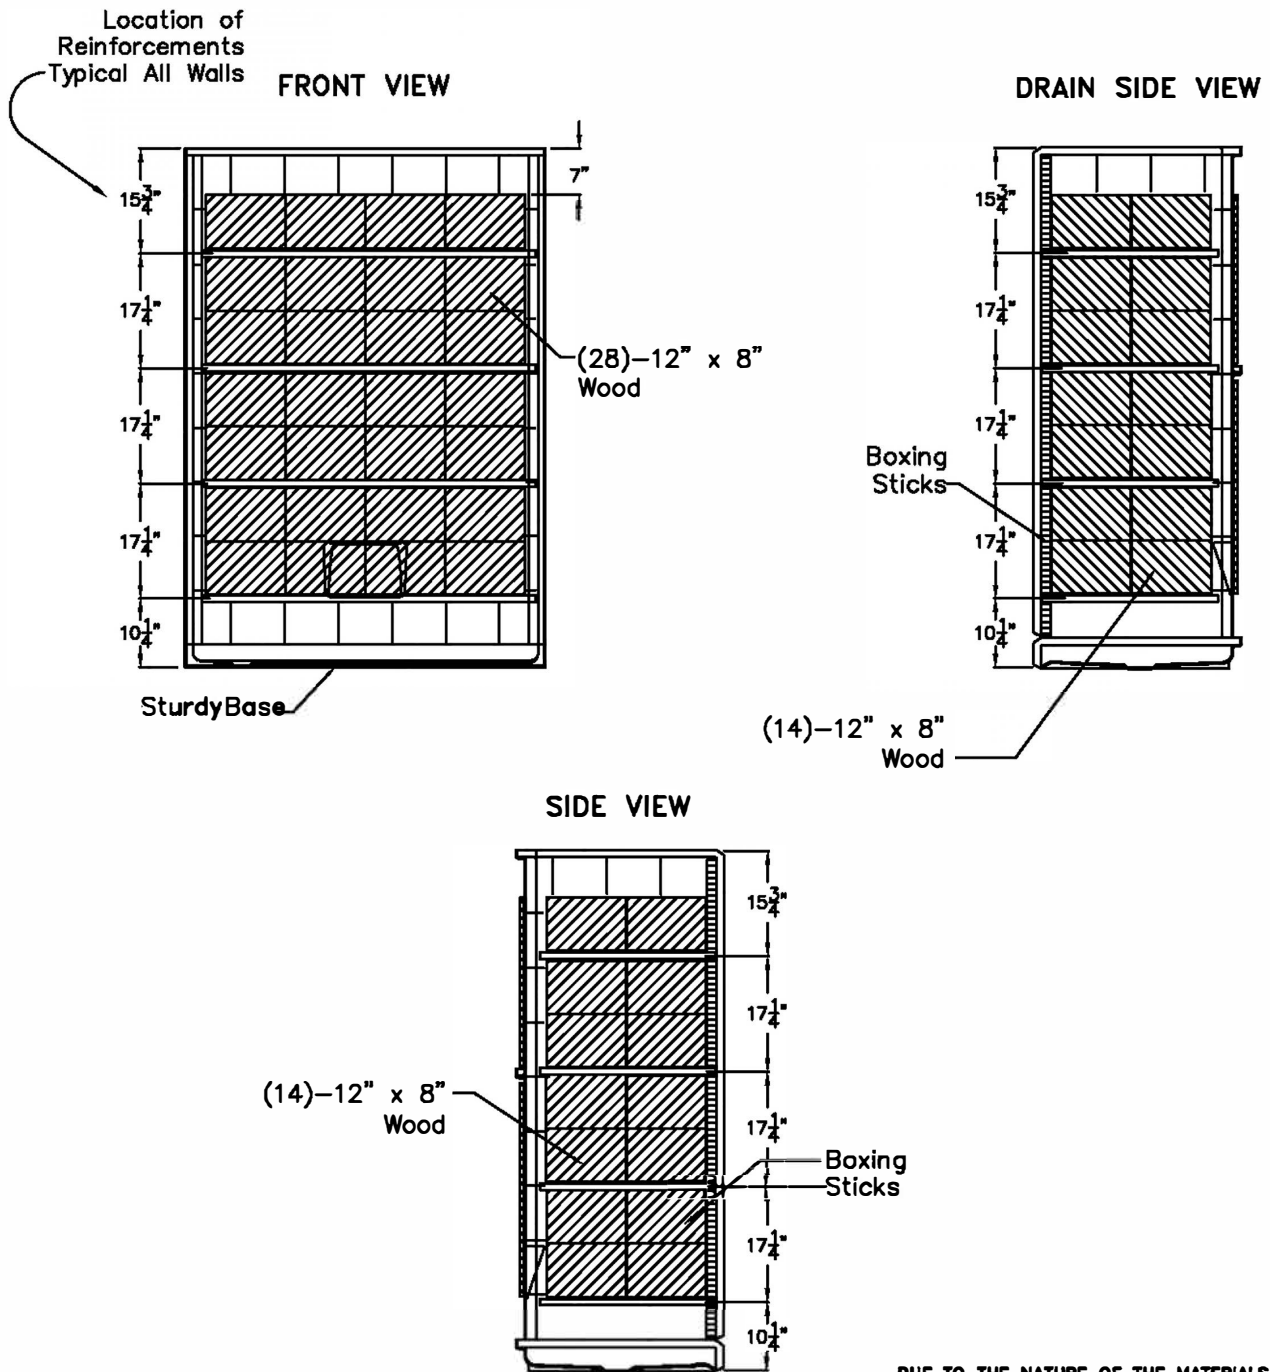

DUE TO THE NATURE OF THE MATERIALS INVOLVED
UNIT DIMENSIONS MAY VARY $\pm 1/2$ INCH

Job Name:		Trending Accessibility	
Model No.:		Drawing#: TAP 5430 BF 5P 1.0 LR Left or Right Drain	
Approved by:	Date Approved:	Date: 12-21-09	Revised: 8-9-13
Rep.:	Wholesaler:	Quote No.:	