


Trending Accessibility


FRONT VIEW

SUBMITTAL DATA

SIDE VIEW

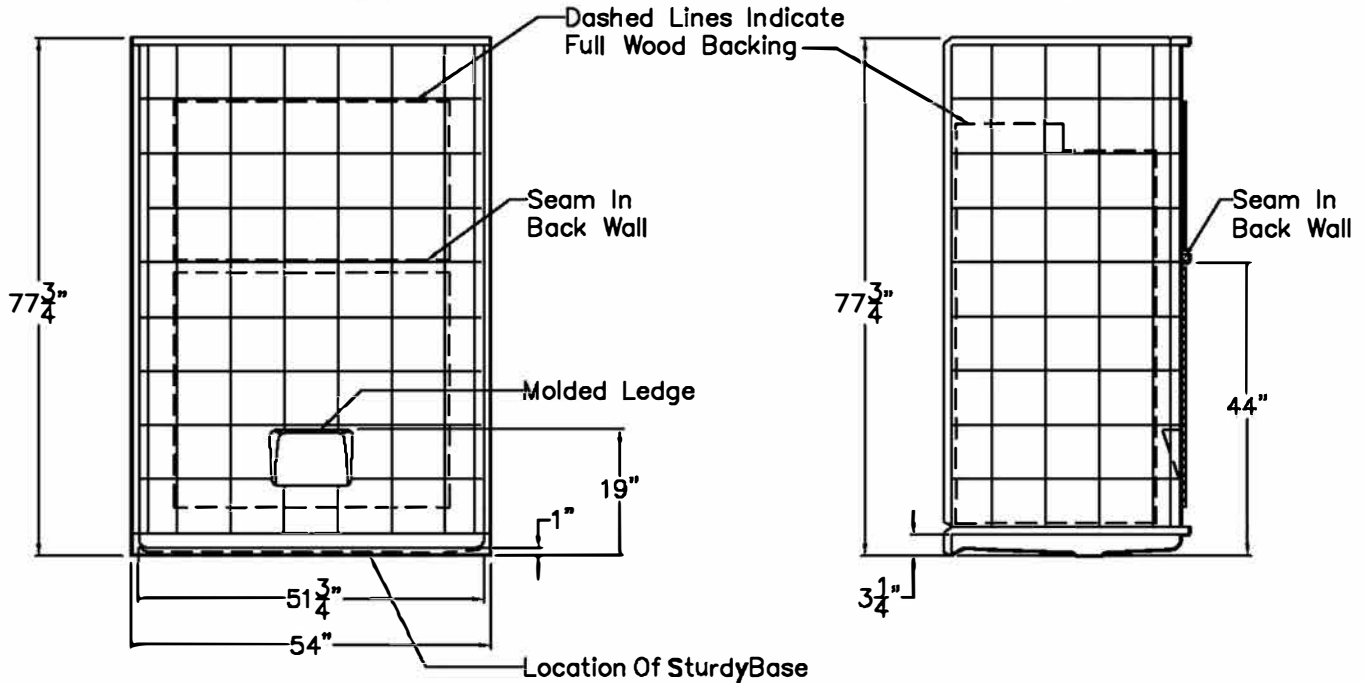

TOP VIEW

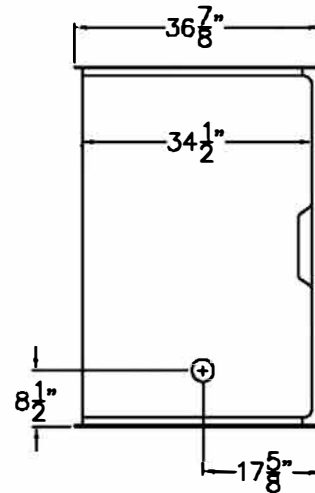


Barrier Free Sectional Shower Stall

The shower enclosure shall be TAP 5436 BF 1.0 Five Piece, Right or Left Drain. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mills, and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a 15% minimum fiberglass content. The unit shall have outside dimensions of 54" x 36 7/8" x 77 3/4". The five piece unit shall meet ANSI Z124.2, NAHB, UPC, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) 1" Threshold, 2) Tile Finish, 3) Two Piece Back Wall, 4) Full wood backing on walls, 5) Left or right drain location, 6) SturdyBase self sustaining bottom, 7) lower molded ledge on back wall.

Detail of 1.0" Threshold

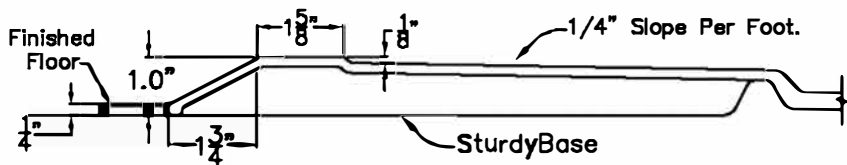

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY ± 1/2 INCH

Trending Accessibility

Model No.:

Drawing#: TAP 5436 BF 5P 1.0
Left or Right Drain

Approved by:

Date Approved:

Date: 3-31-09

Revised: 8-13-13


Rep.:

Wholesaler:

Quote No.

Board Placement Drawing

SUBMITTAL DATA © 2004

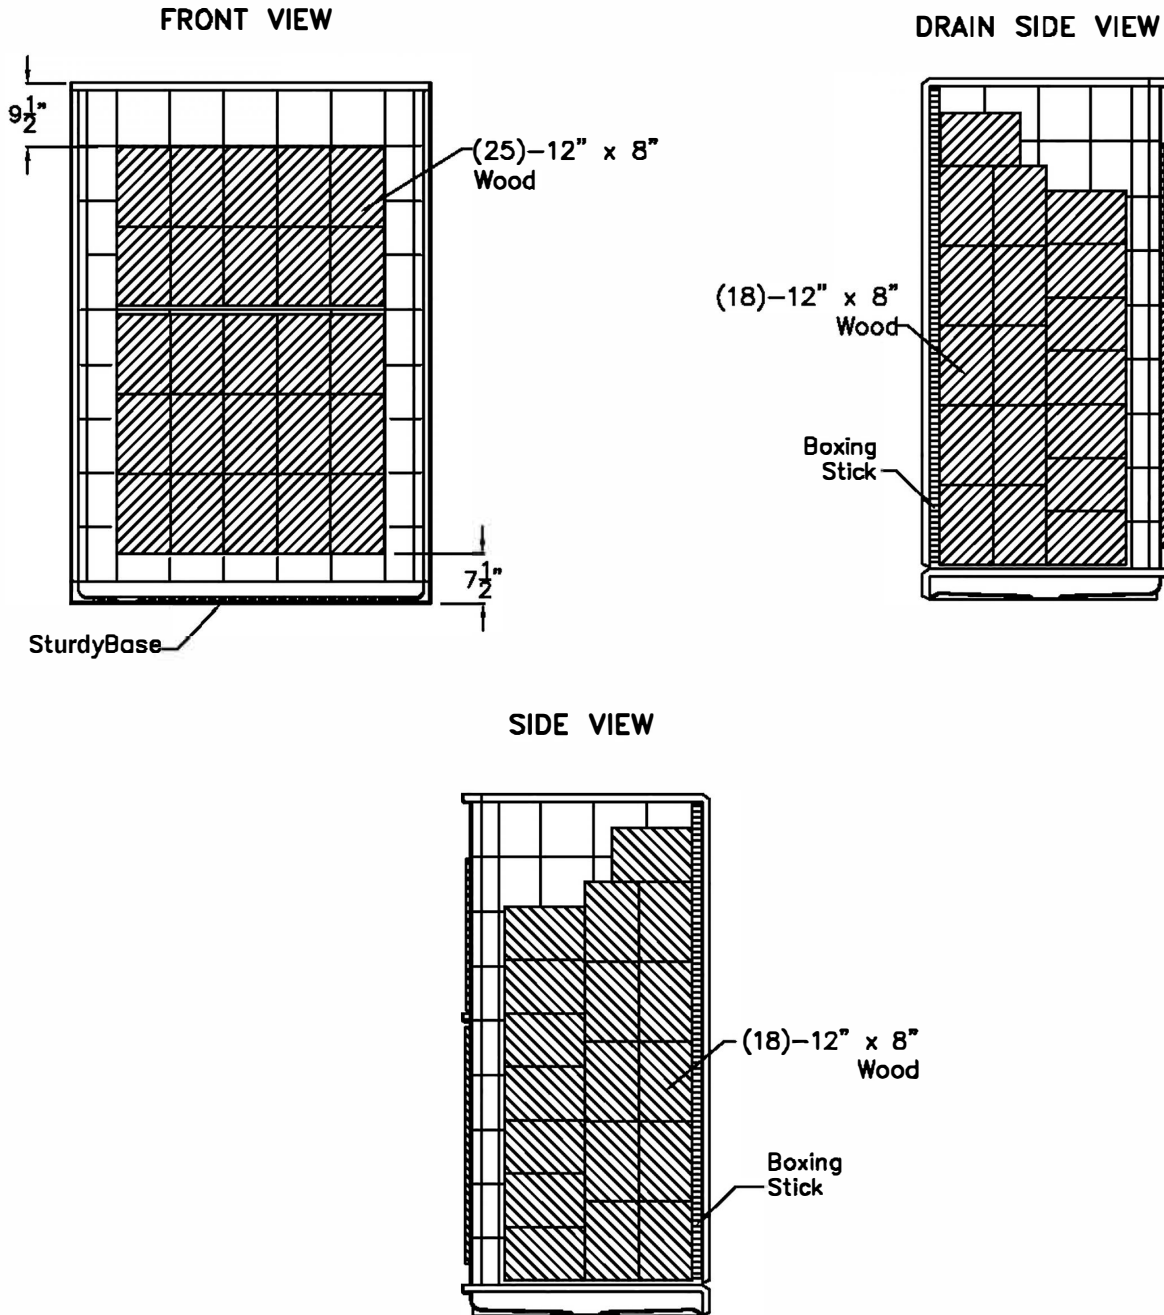

DUE TO THE NATURE OF THE MATERIALS INVOLVED
UNIT DIMENSIONS MAY VARY ± 1/2 INCH

Job Name:		Trending Accessibility	
Model No.:		Drawing#: TAP 5436 BF 5P 1.0 Left or Right Drain	
Approved by:	Date Approved:	Date: 12-21-09	Revised: 5-9-13
Rep.:	Wholesaler:	Quote No.:	