

Trending Accessibility

SUBMITTAL DATA

TOP VIEW



SIDE VIEW




Barrier Free Shower Pan


The shower enclosure shall be TAPP6030 BF 1.0 Pan, Left—Right Drain. Finished surface shall be of a sanitary—grade Polyester Gelcoat exibiting a minimal thickness of 15 dry mils, and a finished cured Barcol hardness of 80—90 as tested with ASTM D—2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimensions of 60" x 31" x 4 1/2". The gelcoat pan shall meet ANSI Z124.2, NAHB, UPC, comply with CSA, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) Low entry 1.0" Threshold.
- 2) Available Left or Right Hand Drain Location.
- 3) SturdyBase self-sustaining bottom.

FRONT VIEW



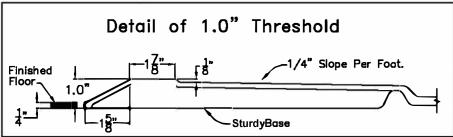

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY $\pm~1/2~$ INCH

Job Name:			ending Accessibility	
Model No.:		Drawing#: TAPP 60	Drawing#: TAPP 6030 BF 1.0 Pan Left or Right Drain	
Approved by:	Date Approved:	Date: 3-31-09	Revised: 8-30-11	
Rep.:	Wholesaler:	Quote No.		
BITTE TO MITTER				