


TOP VIEW

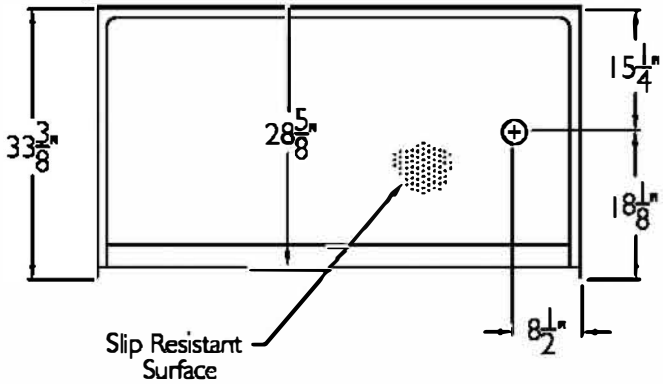


SUBMITTAL

This shower enclosure shall be model TAPP 6033 SH 4.0 Base L / R drain. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" x 33 3/8" x 6.0" with a 4.0" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.


FRONT VIEW

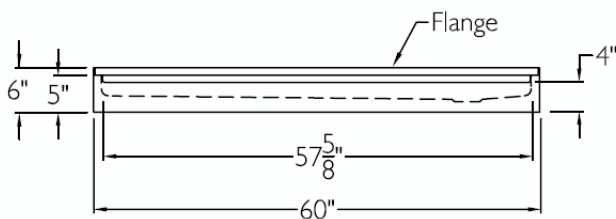

The enclosure shall be equipped with the following features:

- 1) Gelcoat Surface finish,
- 2) Slip resistant surface on floor,
- 3) Wood base with leveling leg,
- 4) 4.0" threshold.

SIDE VIEW

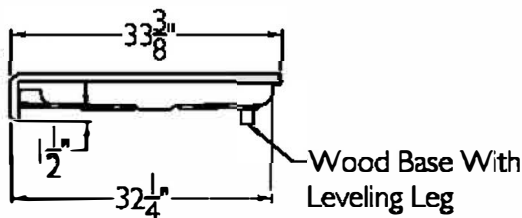

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 33 3/8". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: TAP 6033 SH 4.0.

Job Name	Approved By	Name	Date	Trending Accessibility	
	Architect			Model No. TAPP 6033 SH 4.0 LR Base	
	Engineer			Drawing No. TAPP 6033 SH 4.0	
	Rep			Date Issued, 5-8-12	Drawing Rev.
	Wholesaler			Material. Gelcoat	
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2"$	